

DIN 844 BKMN



B

Frezy trzpieniowe walcowo-czołowe z ostrzami centralnymi, wielostrzowe, z chwytem walcowym z płaską, krótkie

End mills centre cutting, multiflute, with flatted shank, standard series

Schaftfräser, Zentrumschnitt, Zylinderschaft mit Mitnahmevläche, 4-8 Schneiden, kurz

Фрезы концевые с центральным зубом, многоперьевые, хвостовик с лыской, стандартные

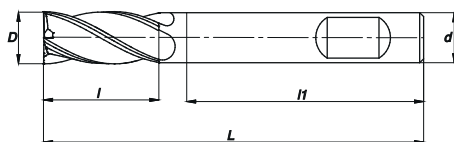

D (js14)	d (h6)	L	l	l1	z	HSS-E	
						Code No 0641-551-	
2	6	51	7	36	4	725103	●
2.5	6	52	8	36	4	725116	○
3	6	52	8	36	4	725205	●
3.5	6	54	10	36	4	725218	○
4	6	55	11	36	4	725307	●
4.5	6	55	11	36	4	725409	○
5	6	57	13	36	4	725500	●
5.5	6	57	13	36	4	725513	○
6	6	57	13	36	4	725602	●
6.5	10	66	16	40	4	725615	○
7	10	66	16	40	4	725704	●
7.5	10	66	16	40	4	725717	○
8	10	69	19	40	4	725806	●
8.5	10	69	19	40	4	725819	○
9	10	69	19	40	4	725908	○
9.5	10	69	19	40	4	725910	○
10	10	72	22	40	4	726002	●
11	12	79	22	45	4	726104	○
12	12	83	26	45	4	726206	●
13	12	83	26	45	4	726308	○
14	12	83	26	45	4	726400	●
15	12	83	26	45	4	726501	○
16	16	92	32	48	4	726603	●
17	16	92	32	48	4	726705	○
18	16	92	32	48	4	726807	●
19	16	92	32	48	4	726810	○
20	20	104	38	50	4	726909	●
21	20	104	38	50	4	727003	○
22	20	104	38	50	6	727105	○
23	20	104	38	50	6	727207	○
24	25	121	45	56	6	727309	○
25	25	121	45	56	6	727400	●
26	25	121	45	56	6	727502	○
28	25	121	45	56	6	727604	○
30	25	121	45	56	6	727706	○
32	32	133	53	60	6	727808	○
35	32	133	53	60	6	727900	○
36	32	133	53	60	6	728004	○
40	40	155	63	70	8	728106	○
44	40	155	63	70	8	728208	○
45	40	155	63	70	8	728300	○
50	50	177	75	80	8	728401	○
56	50	177	75	80	8	728505	○
63	50	192	90	80	8	728607	○