

DIN 844 BKMW



B

Frezy trzpieniowe walcowo-czołowe z ostrzami centralnymi, 3-ostrzowe, z chwytem walcowym z płaską, krótkie

End mills centre cutting, 3-flute, with flatted shank, standard series

Schaftfräser, Zentrumschnitt, Zylinderschaft mit Mitnahmevläche, 3-Schneiden, kurz

Фрезы концевые с центральным зубом, 3-х перьевые, хвостовик с лыской, стандартные

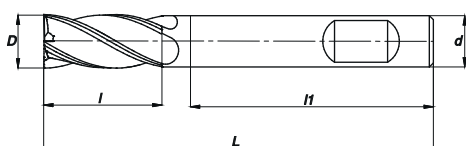

D (k10)	d (h6)	L	l	l1	z	HSS-E	
						Code No 0641-551-	
5	6	57	13	36	3	825108	●
5.5	6	57	13	36	3	825110	○
6	6	57	13	36	3	825200	●
6.5	10	66	16	40	3	825212	○
7	10	66	16	40	3	825301	○
7.5	10	66	16	40	3	825314	○
8	10	69	19	40	3	825403	●
8.5	10	69	19	40	3	825416	○
9	10	69	19	40	3	825505	○
9.5	10	69	19	40	3	825518	○
10	10	72	22	40	3	825607	●
11	12	79	22	45	3	825709	○
12	12	83	26	45	3	825800	●
13	12	83	26	45	3	825902	○
14	12	83	26	45	3	826007	●
15	12	83	26	45	3	826109	○
16	16	92	32	48	3	826200	●
17	16	92	32	48	3	826302	○
18	16	92	32	48	3	826404	●
19	16	92	32	48	3	826506	○
20	20	104	38	50	3	826608	●
21	20	104	38	50	3	826700	○
22	20	104	38	50	3	826801	○
23	20	104	38	50	3	826903	○
24	25	121	45	56	3	827008	○
25	25	121	45	56	3	827100	○
26	25	121	45	56	3	827201	○
28	25	121	45	56	3	827303	○
30	25	121	45	56	3	827405	○
32	32	133	53	60	3	827507	○
35	32	133	53	60	3	827609	○
36	32	133	53	60	3	827700	○
40	40	155	63	70	3	827802	○
44	40	155	63	70	3	827904	○
45	40	155	63	70	3	828009	○
50	50	177	75	80	3	828100	○
56	50	177	75	80	3	828202	○
63	50	192	90	80	3	828304	○